


K0625S (latching push type)

DRAWING (mm)



PHOTO

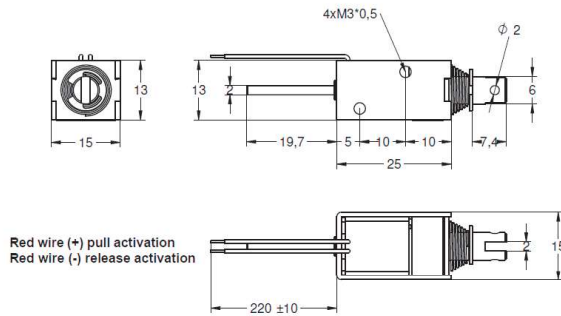

MODEL NO. DESIGNATION

K0625S - VOLTAGE

Example: K0625S-12V

SOLENOID DATA

Duty cycle / ED (%) ▶	Continuous (100%)	Intermittent (50%)	Intermittent (25%)	Intermittent (10%)	
Watts @ 20°C ▶	2.5	5	10	25	
Maximum time in energized state (in seconds) ▶	∞	60	34	7	
Part ▼	Resistance (20°C) ± 10% (Ω) ▼	DC Volts (V) ▼			
K0625S-06V	14.4	4.2	6	8.5	13.4
K0625S-12V	57.6	8.5	12	17	26.8
K0625S-24V	230.4	17	24	34	53.6

SOLENOID FEATURES AND STANDARD DATA

	STANDARD	CUSTOMIZATION OPTIONS
Type	Push type latching DC solenoid	
Cable	Flying wire 230mm	Length, type and connector
Voltage	6 to 24 VDC @ 100% ED	Other voltages upon request
Life time	At least 500.000 single strokes	
Plunger material	Carbon steel 12L14	
Protection class	IP00	
Insulation grade	B	
Operating temperature	-5°C ... +40°C	
Manufacturing quality standards	ISO9001:2008, ISO/TS 16949:2002	
RoHS compliance	Yes	
CE approval	No	
UL approval	No	

ADDITIONAL DATA

Holding force, permanent magnet	300g
Weight	26g
Return spring	Yes

SPRING DATA

Loading force @ 1mm compression	30g
---------------------------------	-----

PLUNGER PROFILE



DIAGRAM

